



# Logitech Webcam Pro 9000 Camera Replacement

Should you be having difficulties with this camera, refer to this guide.

Written By: nieko



## INTRODUCTION


This guide will lead you in desoldering the connections between the camera and the motherboard.

---

### TOOLS:

- [Soldering Workstation](#) (1)
  - [Solder](#) (1)
  - [Desoldering Braid](#) (1)
  - [Phillips #0 Screwdriver](#) (1)
-



## Step 1 — Front and Back Cover

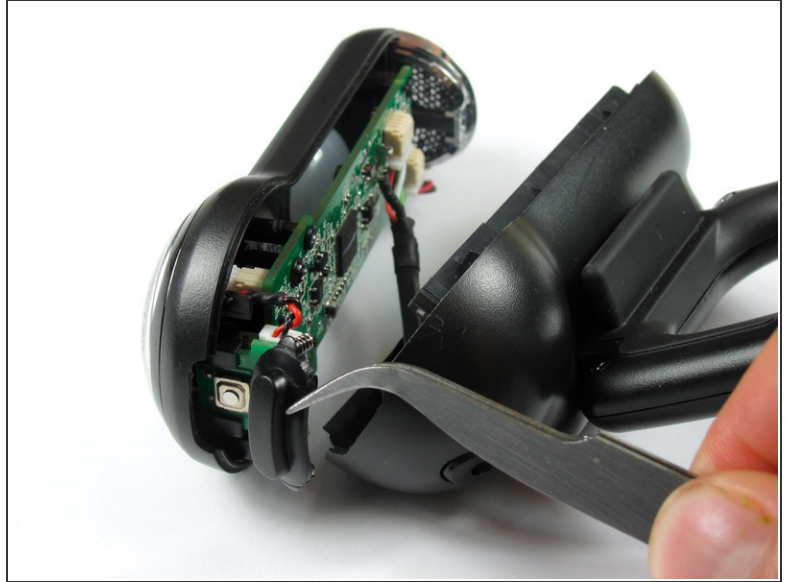


- Remove the two 8mm Phillips#0 screws on the back cover.

- ⚠ The motherboard is attaching the two covers together, so don't separate them entirely just yet.
- ⓘ There is a button that loosens as the Phillips screws are removed. Don't be alarmed if it falls out.


## Step 2

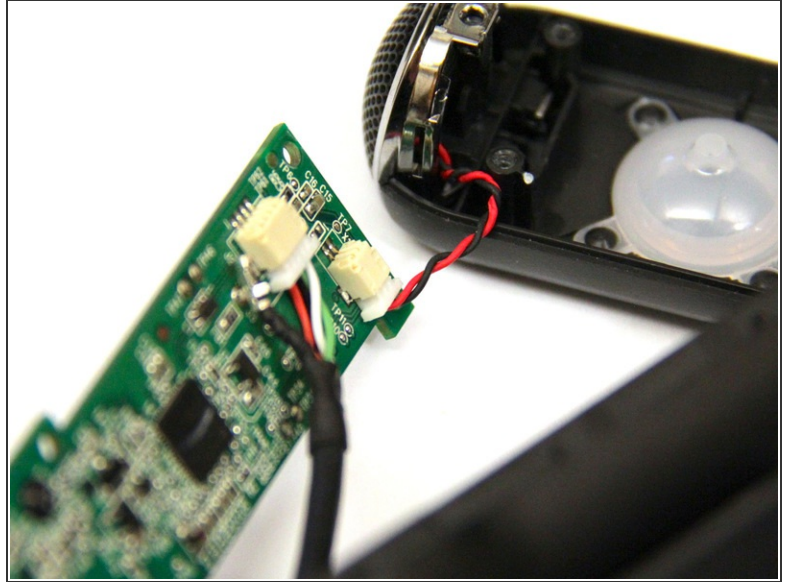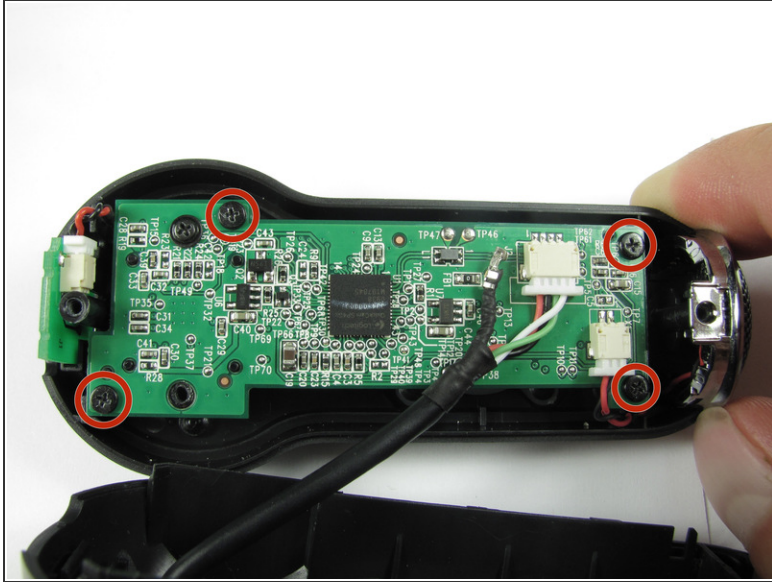

- Remove the four 6mm Phillips#0 screws connecting the motherboard and front cover.



 **DO NOT** detach the wire connecting the motherboard to the front cover.

## Step 3 — Camera

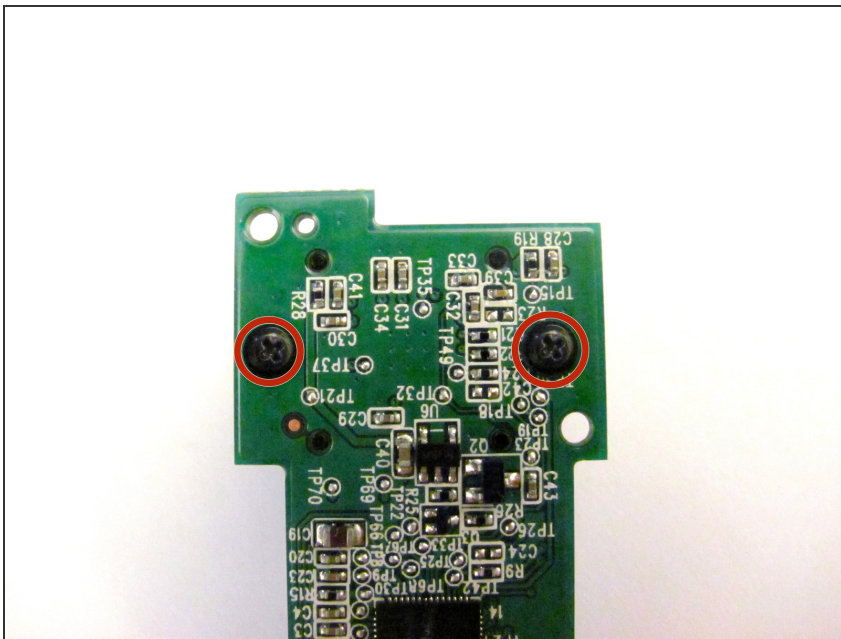

- Remove the two 8mm Phillips#0 screws on the back of the motherboard.

## Step 4

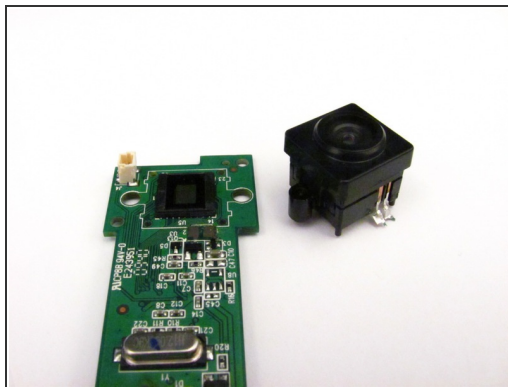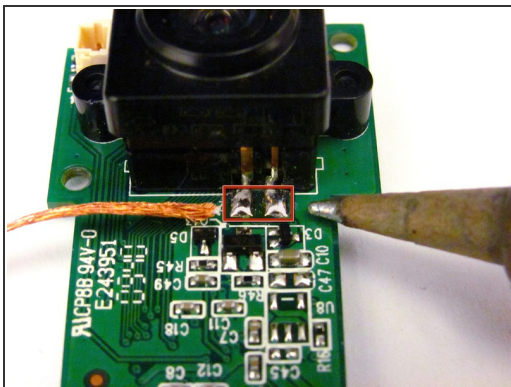

- Remove the camera from the motherboard by desoldering the two connections as shown.

 Follow this [link](#) to learn how to properly solder and desolder your parts.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-29 07:23:48 AM.